
545 1A SUPPLY & DISTRIBUTION MODULE [+15/-15/+5 VOLT]



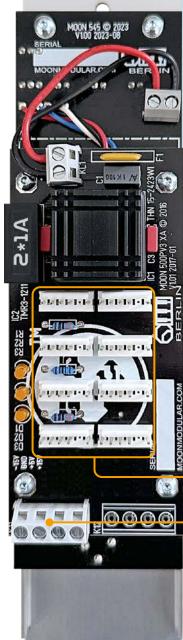


The **M 545 1A Power Module** combines a une unit module with a eight header distribution board, a four jack multiple, master switch and display leds for the three voltages.

Eight DotCom\* style power connectors to feed the attached modules.

Via the dedicated connector an extra power distribution board (500PD) ca be applied to drive more modules.

The three output voltages are +15 V (1 A) | -15 V (1 A) | +5V (0.6 A)

A 2.5A external multi region power adapter and eight 500–PDotCom cables are included.



8 DotCom\* style connection headers to feed the modules


Connection point to feed an extra power distribution board 500PD (not included)

\*Trademarks are the property of their respective owners • Due to continual product improvements, specifications are subject to change without notice.

## 545 20 CONTRIBUTION MODULE [+15/-15/+5 VOLT]



Extra power distribution board (500PD)

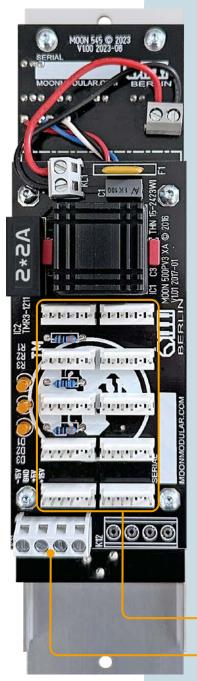

The **M 545 2A Power Module** combines a one unit module with a ten header distribution board, a four jack multiple, master switch and display leds for the three voltages.

Ten on board DotCom\* style power connectors to feed the attached modules plus one extra distribution board.


The three output voltages are +15 V (2 A) | -15 V (2 A) | +5V (1.2 A).

A 5A external multi region power adapter and sixteen 500-PDotCom cables (40 cm long) are included as well as a dedicated power distribution board with ten DotCom\* and three COTK\* headers (500PD).



10 DotCom\* style connection headers to feed the modules

Connector to feed the extra distribution board (500PD)

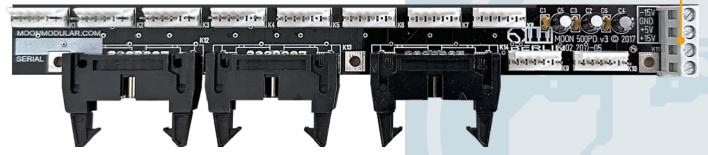

\*Trademarks are the property of their respective owners • Due to continual product improvements, specifications are subject to change without notice.

WWW.LUNAR-EXPERIENCE.COM